Connecticut Precast Corp.

Manufacturers of Concrete Products

555 Fan Hill Road, Monroe, CT 06468 Telephone (203) 268-8688 Fax (203) 452-1007


www.ctprecast.com

Pump Chamber

MODEL NO.	LIQUID CAPACITY	LENGTH L	WIDTH W	INVERT I	HEIGHT H	WEIGHT (LBS.)
P2000(6X12)	2000	13'-0"	7'-0"	See Below	6'-2"	29800
Invert (I) for Ø4" PVC is 4'-7". Invert (I) for Ø6" PVC is 4'-6".						

PRECAST CONCRETE 2000 Gallon Capacity 6'-0" X 12'-0" (H20 Loading)



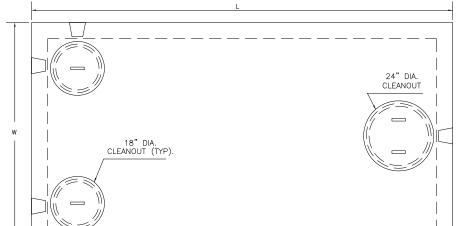

NOTES:

- 1. Concrete 4,000 PSI @ 28 DAYS.


- Meets or exceeds state and local requirements.
 All shiplap joints sealed with Butyl Rubber.
 Design loading: AASHTO HS-20.
 Single compartment chamber.
 Side inlet pipes shall extend to cleanout cover thru cast in pine support. thru cast in pipe support.

 Maximum fill over top of chamber — 3 feet.

 Chamber shall be supplied with tees.

 Chamber shall be marked with manufacturer name,

- and phone no.,tank capacity,date of manufacture, and ASTM C1227 conformance.

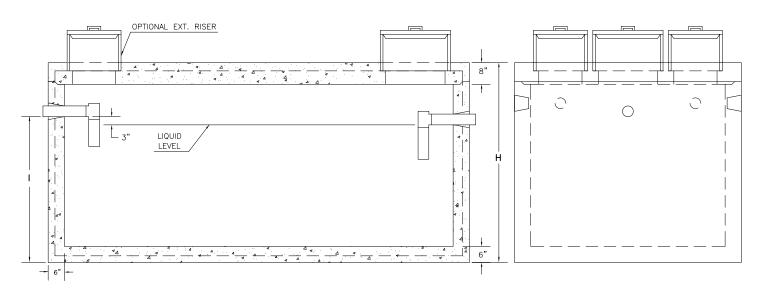

**=Nominal Dimension. Slight variation in dimensions may occur due to tapering for manufacturing purposes.