Connecticut Precast Corp.

Manufacturers of Concrete Products

555 Fan Hill Road, Monroe, CT 06468 Fax (203) 452-1007


www.ctprecast.com

Pump Chamber

MODEL NO.	LIQUID CAPACITY	LENGTH L	WIDTH W	INVERT I	HEIGHT H	WEIGHT (LBS.)
P3000(6X12)	3000	13'-0"	7'-0"	See Below	7'-10"	34500
Invert (I) for Ø4" PVC is 6'-4". Invert (I) for Ø6" PVC is 6'-3".						

PRECAST CONCRETE 3000 Gallon Capacity 6'-0" X 12'-0" (H20 Loading)



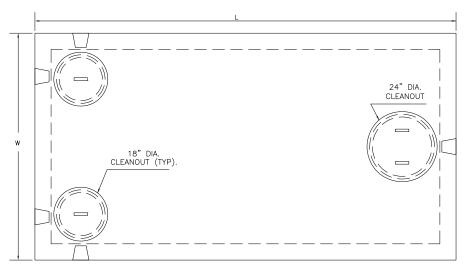

NOTES:

- 1. Concrete 4,000 PSI @ 28 DAYS.
- 2. Meets or exceeds state and local requirements.
- 3. All shiplap joints sealed with Butyl Rubber.
- 4. Design loading: AASHTO HS-20.
- 5. Single compartment chamber.
- 6. Side inlet pipes shall extend to cleanout cover thru cast in pipe support.

 Maximum fill over top of chamber — 3 feet.
- 8. Chamber shall be supplied with tees.
- Chamber shall be marked with manufacturer name, and phone no.,tank capacity,date of manufacture, and ASTM C1227 conformance.

