


Connecticut Precast Corp.

555 Fan Hill Road, Monroe, CT 06468

Telephone (203) 268-8688

Fax (203) 452-1007

Precast Chamber

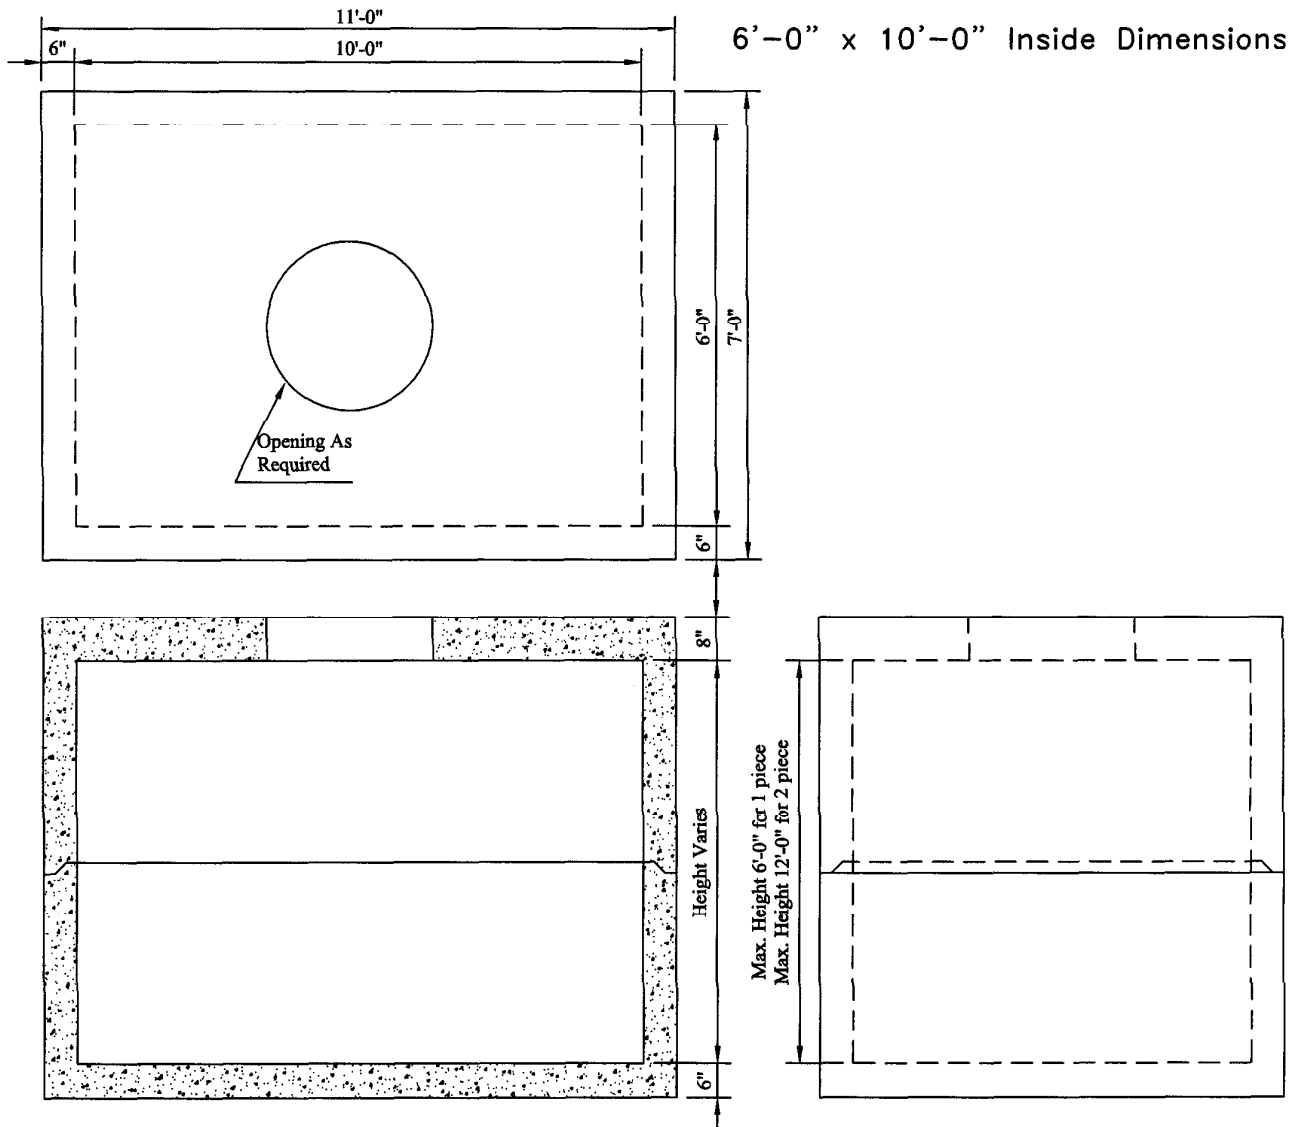

NOTES:

1. Minimum Concrete Compressive Strength: 5,000 PSI @ 28 Days.
2. Design Loading: AASHTO HS-20.
3. Construction joint shall be sealed with butyl rubber conforming to ASTM C443 and C990, AASHTO M-198 Type B.
4. Reinforcing steel conforms to ASTM A-615 Spec. Grade 60, 1" minimum cover.