

Manufacturers of Concrete Products

555 Fan Hill Road, Monroe, CT 06468 Telephone (203) 268-8688 Fax (203) 452-1007

www.ctprecast.com


Pump Chamber


PRECAST CONCRETE 1500 Gallon Capacity Residential


NOTES:

- Concrete 4,000 PSI @ 28 DAYS.
- 2. Meets or exceeds state and local requirements.
- 3. All shiplap joints sealed with Butyl Rubber. 4. Non-traffic loading use only.
- Single compartment chambér. Monolithic Design.
- 6. Side inlet pipes shall extend to cleanout cover thru cast in pipe support.
- 7. Maximum fill over top of tank 3 feet.
- Chamber shall be supplied with tees.
- 9. Chamber shall be marked with manufacturer name, phone no., tank capacity, date of manufacture, and ASTM C1227 conformance.



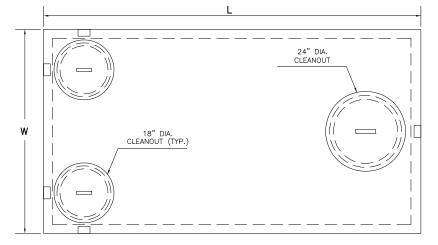

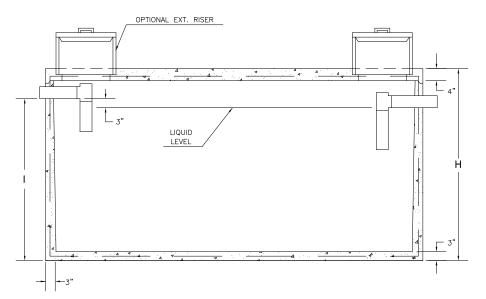



^{**=}Nominal Dimension. Slight variation in dimensions may occur due to tapering for manufacturing purposes.