Connecticut Precast Corp.

Manufacturers of Concrete Products

555 Fan Hill Road, Monroe, CT 06468

Telephone (203) 268-8688 Fax (203) 452-1007 www.ctprecast.com

Pump Chamber


PRECAST CONCRETE 2000 Gallon Capacity Residential


NOTES:

- 1. Concrete 4,000 PSI @ 28 DAYS.
- Meets or exceeds state and local requirements.
 All shiplap joints sealed with Butyl Rubber.
- 4. Non-traffic loading use only.
- Single compartment chamber.
- Side inlet pipes shall extend to cleanout cover thru cast in pipe support.

 Maximum fill over top of tank — 3 feet.
- 8. Chamber shall be supplied with tees.
 9. Chamber shall be marked with manufacturer name, phone no., tank capacity, date of manufacture, and ASTM C1227 conformance.

LIQUID LENGTH WIDTH INVERT WEIGHT MODEL HEIGHT (LBS.) NO. CAPACITY W Н P2000RES 2000 11'-11 6'-6' 4'-8" 5'-8" 13500

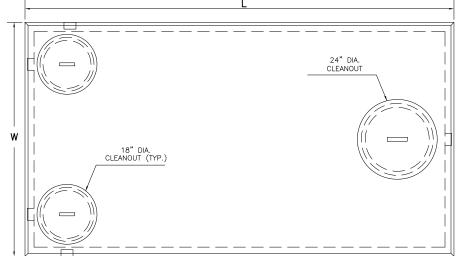

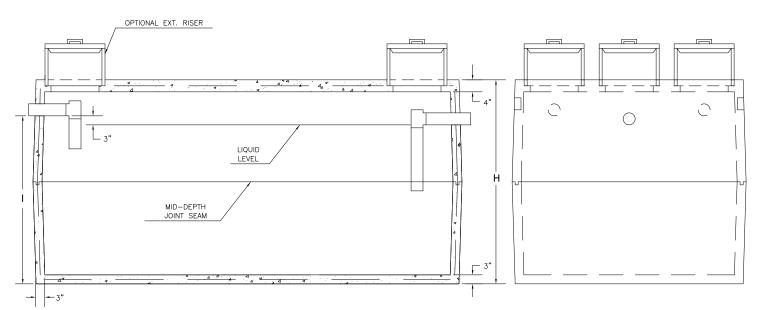

**=Nominal Dimension. Slight variation in dimensions may occur due to tapering for manufacturing purposes.